TECH DATA SHEET





Swim year-round with the high-performance Platinum Series inverter heat pump!

Engineered with the very latest full DC inverter technology, The Platinum series allows so you can swim all year round with the lowest operating costs.

It's premium features make the Platinum Series a standout, with a stylish metal cabinet, powerful performance, wi-fi control and an intelligent LCD touch screen controller with 4 smart operating modes.


The unique design provides vertical air discharge from the top and bottom of the heat pump, delivering better airflow, higher efficiencies, and space saving installation options.

- Modern Metal Cabinet: durable against harsh weather conditions.
- Intelligent Controller: 4 smart operating modes
- C.O.P of up to 16.5
- Top & bottom air discharge
- Latest DC full inverter technology including compressor, fans & control
- Wi-Fi Control: control your pool heater anywhere, anytime.

| | | Heating | | Heating | | Cooling | | |
|---------------------------|--------------|------------------------------|--------|---------------|-------------|------------------|------------|--|
| Performance | | Winter | | Summer | | Summer | | |
| Ambient Air Temp. | °C | 15 | | 27 | | 35 | | |
| Entering Water Temp. | °C | 26 | | 26 | | 30 | | |
| Heating/Cooling Capacity | kW | 5.0~23.5 | | 7.1~30.0 | | 13.53 | | |
| Consumed Power | kW | 0.66~4.61 | | 0.44~4.17 | | 4.2 | | |
| C.O.P. | | 7.6~7.2 | | 16.1~7.2 | | 3.2 | | |
| Power Supply | 220-240/1/50 | | | | | | | |
| Air Flow | m³/h | 3000-4500 | | | | | | |
| Compressor | | Туре | | Brand | | No. | | |
| | | Rotary | | Panasonic | | 1 | | |
| Heat Exchanger | | Material | | Туре | | Spiral (Twisted) | | |
| | | Titanium | | Tube in shell | | Yes | | |
| Fan | | No. | Power | Input | Speed | | Direction | |
| | | 1 | 1 60 W | | 400-800 RPM | | Horizontal | |
| Operating Air Temp. | °C | -15 to 43 | | | | | | |
| Max. Rated Input Power | kW | 5.05 | | | | | | |
| *Running Current at 100% | А | 21.4 | | | | | | |
| Refrigerant | | R32 | | | | | | |
| Casing Type | | Matte-finished sheet metal | | | | | | |
| Connection Type | | Hardwired | | | | | | |
| Defrost | | Auto Defrost (Reverse Cycle) | | | | | | |
| Moisture Resistance | | IPX4 | | | | | | |
| Noise (1M) | dB(A) | 44-55 16-27 | | | | | | |
| Noise (10M) | άв(А) | | | | | | | |
| Water Connection | mm | 40 | | | | | | |
| Water Flow Volume | L/min | 200 | | | | | | |
| Water Pressure Drop (max) | kPa | 12.5 | | | | | | |
| Net Weight | kg | 145 | | | | | | |
| Net Dimensions (LxWxH) | mm | 1330 x 548 x 930 | | | | | | |

*Running current does not include load of circulation pump.



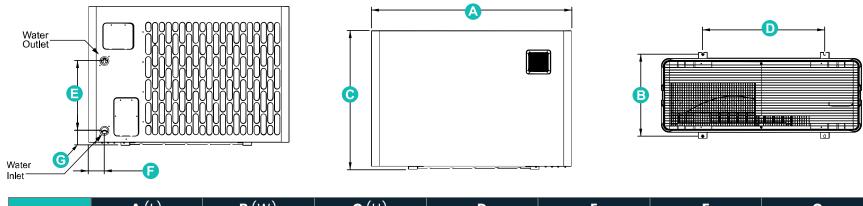

| Unit: mm | A (L) | B (W) | С(Н) | D | E | F | G |
|----------|--------------|--------------|------|-----|-----|-----|----|
| | 1330 | 548 | 930 | 810 | 466 | 106 | 98 |